

[illegible]







A horizontal timeline bar with tick marks at 0, 5', 10', 20', and 40'. The bar is divided into three segments: a solid black segment from 0 to 5', a white segment with a black border from 5' to 10', and a solid black segment from 10' to 40'.



VICINITY MAP



PROPOSED PLANT PALETTE

TREES		SIZE/COMMENTS/QUANTITY
	MULGA ACACIA ACACIA ANEURA	36" BOX, LOW BREAKER MATCHED, 2 QTY
	EVERGREEN ELM ULMUS PARVIFOLIA	36" BOX, STANDARD MATCHED, 9 QTY
	SISSOO TREE DALBERGIA SISSOO	36" BOX, STANDARD MATCHED, 18 QTY
	CHINESE PISTACHE PISTACIA CHINENSIS	36" BOX, STANDARD MATCHED, 8 QTY
	THORNLESS CASCALOTE CAESALPINIA CACALACO 'SMOOTHIE'	36" BOX, LOW BREAKER MATCHED, 3 QTY
<u>SHRUBS</u>		
	BAJA RUELLIA RUELLIA PENINSULARIS	5 GAL, 74 QTY
	RIO BRAVO SAGE LEUCOPHYLLUM LANGMANIAE	5 GAL, 44 QTY
	RED YUCCA HESPERALOE PARVIFLORA	5 GAL, 18 QTY
	YELLOW BELLS TECOMA STANS	5 GAL, 27 QTY
<u>GROUND COVER</u>		
	TRAILING YELLOW LANTANA LANTANA 'NEW GOLD'	1 GAL @ 3' O.C., 67 QTY
	MEXICAN PETUNIA RUELLIA BRITTONIANA	1 GAL @ 4' O.C., 65 QTY
DG	DECOMPOSED GRANITE MOUNTAIN VISTA BROWN	3/4" SCREENED 2" DEPTH TYP.

1. ALL PLANTING AREAS TO HAVE TOP DRESSING OF DECORATIVE ROCK, SIZE & COLOR AS CALLED FOR ON PLANS, 2" DEPTH, TYP. APPLIED OVER PRE-EMERGENT PER MFG. SPECS, 2 APPLICATIONS, MINIMUM.
2. VERIFY ALL CONDITIONS IN FIELD PRIOR TO BIDDING/ INSTALLATION. DISCREPANCIES SHALL BE BROUGHT TO THE LANDSCAPE ARCHITECT'S ATTENTION, IN WRITING.
3. NO PLANT SUBSTITUTION ALLOWED UNLESS APPROVED BY LANDSCAPE ARCHITECT.
4. LANDSCAPE ARCHITECT TO APPROVE ALL TREES AND SHRUBS PRIOR TO DELIVERY TO SITE.
5. LANDSCAPE ARCHITECT OR HIS REPRESENTATIVE RESERVE THE RIGHT TO REFUSE ANY PLANT HE/SHE DEEMS UNACCEPTABLE.
6. FOR CLARIFICATION OF DISCREPANCIES BETWEEN THE DRAWINGS AND THE SITE, THEY SHOULD BE BROUGHT TO THE ATTENTION OF THE LANDSCAPE ARCHITECT PRIOR TO BEGINNING WORK.
7. LANDSCAPE CONTRACTOR IS RESPONSIBLE TO TAKE PRECAUTIONS TO PROTECT ANY EXISTING IMPROVEMENTS.
8. PLANT LIST/QTYS PROVIDED FOR CONTRACTOR'S CONVENIENCE ONLY. PLANS TAKE PRECEDENCE.
9. FINISHED GRADE BELOW ALL PLANTERS SHALL BE 1" BELOW ADJACENT HEADER, PAVING, CURBING, ETC.
10. GROUNDCOVER AND/OR DECORATIVE ROCK SHALL EXTEND UNDER SHRUBS UNLESS NOTED.
11. ALL EARTHWORK IS TO BE DONE SO THAT ALL WATER DRAINS AWAY FROM ALL STRUCTURES.
12. ALL UNDERGROUND CONDUITS/PIPES/UTILITIES ARE TO BE LOCATED PRIOR TO DIGGING.
13. CONTRACTOR IS RESPONSIBLE FOR ALL REQUIRED SLEEVING WHETHER IT IS SHOWN ON THE PLANS OR NOT.
14. ADJUST NEW LANDSCAPE TO ACCOMMODATE EXISTING LANDSCAPE TO REMAIN.
15. LANDSCAPE CONTRACTOR RESPONSIBLE TO MAINTAIN EXISTING PLANT MATERIAL TO REMAIN IN GOOD, HEALTHY CONDITION DURING CONSTRUCTION.
16. ANY EXISTING PLANT MATERIAL NOT SHOWN TO REMAIN IS TO BE REMOVED BY CONTRACTOR.

1. PROPERTY OWNER SHALL PROPERLY MAINTAIN ALL LANDSCAPE MATERIAL AND LANDSCAPED AREAS, INCLUDING THAT WITHIN THE PUBLIC RIGHT OF WAY ADJACENT TO THE DEVELOPMENT, IN ACCORDANCE WITH THE APPROVED LANDSCAPE PLAN.
2. REPLACEMENT OF DEAD TREES ALONG THE ARTERIAL ROADS SHALL BE BY THE INDIVIDUAL PROPERTY OWNER OR PROPERTY MANAGEMENT ASSOCIATION AND SHALL BE COMPLETED WITHIN 3 (THREE) MONTHS FROM THE DATE THAT THE ASSOCIATION OR PROPERTY OWNER IS NOTIFIED BY THE CITY.

OPEN SPACE PROVIDED: 5,198 S.F.
LIVE COVERAGE PROVIDED: 2,146 S.F. = 41%
TREES REQUIRED: 9 TREES
TREES PROVIDED: 21 TREES
SHRUBS REQUIRED: 52 SHRUBS
SHRUBS PROVIDED: 81 SHRUBS

PARKING ISLANDS PROVIDED: 20
TREES REQUIRED: 20 TREES
TREES PROVIDED: 20 TREES
SHRUBS REQUIRED: 60 SHRUBS
SHRUBS PROVIDED: 84 SHRUBS



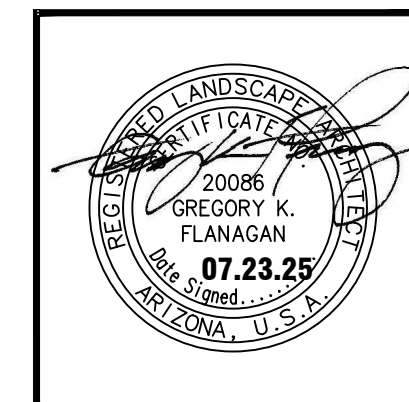
BUFFALO WILD WINGS MARICOPA

42080 W. MARICOPA—CASA GRANDE HWY.
MARICOPA, ARIZONA 85138

G.K. FLANAGAN
ASSOCIATES INC.

ASSOCIATES, INC.
LANDSCAPE ARCHITECTURE
PLANNING

4626 N. 44th STREET PHOENIX, AZ 85018
602 . 912 . 9691 tel
602 . 912 . 9693 fax



revisions:

date: 07.23.2025

contents: **PLANTING
PLAN**

sheet no.

L100